

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

FEATURES

Radiation tolerant space dc-dc converter

- Single event effects (SEE) LET performance to 86 MeV cm²/mg
- Total ionizing dose (TID) guaranteed to 100 krad(Si) RHA level R, per MIL-STD-883 method 1019
- Operating temperature -55°C to +125°C
- Qualified to MIL-PRF-38534 Class H and K
- Input voltage range 19 to 40 V
- Transient protection up to 80 V for 50 ms
 - Converter will shut down at an input voltage above approximately 45 volts
- Fully isolated, magnetic feedback
- Fixed high switching frequency
- Remote sense and output trim on single output models
- Primary and secondary inhibit function
- Synchronization input and output
- Indefinite short circuit protection
- High power density with up to 85% efficiency



MODELS	
OUTPUT VOLTAGE (V)	
SINGLE	DUAL
3.3	±5
5	±12
12	±15
15	

DESCRIPTION

The Interpoint® SMFLHP Series™ 28 volt dc-dc converters are rated up to 100 watts output power over a -55°C to +125°C temperature range with a 28 V nominal input. On dual output models, up to 70% of the rated output power can be drawn from either the positive or negative outputs. The welded, hermetically sealed package is only 3.005 x 1.505 x 0.400 inches.

SCREENING

SMFLHP converters offer screening options to Space Prototype (O), Class H, or Class K. Radiation tolerant to radiation hardness assurance (RHA) levels of “-” (O), “P” or “R”, per MIL-PRF-38534. Interpoint model numbers use an “O” in the RHA designator position to indicate the “-” (dash) RHA level of MIL-PRF-38534, which is defined as “no RHA”. See “Table 9: Element Evaluation” on page 14 and “Table 10: Environmental Screening and RHA Levels” on page 15 for more information.

DESIGN FEATURES

The SMFLHP Series converters are switching regulators that use a quasi-square wave, single ended forward converter design with a constant switching frequency of 600 kHz.

Isolation between input and output circuits is provided with a transformer in the forward path and wide bandwidth magnetic coupling in the feedback control loop. The SMFLHP Series uses a unique dual loop feedback technique that controls output current with an inner feedback loop and output voltage with a cascaded voltage mode feedback loop.

The additional secondary current mode feedback loop improves transient response in a manner similar to primary current mode control and allows for ease of paralleling.

Tight load regulation is achieved through a wide-bandwidth magnetic feedback circuit.

INHIBIT

The SMFLHP Series converters have two inhibit terminals (INH1 and INH2) that can be used to disable power conversion, resulting in a very low quiescent input current. See Table 5 on page 6 for specifications.

SYNC

Converters may be synced to an external clock (525 to 675 kHz) or to one another by using the sync in or out pins. See Table 5 on page 6 for specifications.

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

SENSE AND TRIM

Single output models provide sense to maintain voltage at the load. The converters output voltage can also be trimmed up. See Figure 1.

CURRENT SHARING AND PARALLEL OPERATION

Multiple SMFLHP converters may be used in parallel to drive a common load. Only single output models with SENSE and SNS RTN can be used in the share mode. In this mode of operation the load current is shared by two or three SMFLHP converters.

In current sharing mode, one SMFLHP converter is designated as a master. The SLAVE pin (pin 11) of the master is left unconnected and the MSTR/INH2 pin (pin 12) of the master is connected to the SLAVE pin (pin 11) of the slave units.

The units designated as slaves have the MSTR/INH2 pin (pin 12) connected to the SNS RTN pin (pin 9) of the master unit. Figure 2 on page 3 shows the typical setup for two or three units in parallel.

A second slave unit may be placed in parallel with a master and slave; this requires the TRI pin (pin 3) of the master unit to be connected to the SNS RTN pins (pin 9) Figure 2.

In current sharing mode, the converters function as a current source. For this reason it is important that their outputs be connected to the common ground at all times to prevent an excessively high voltage at their outputs.

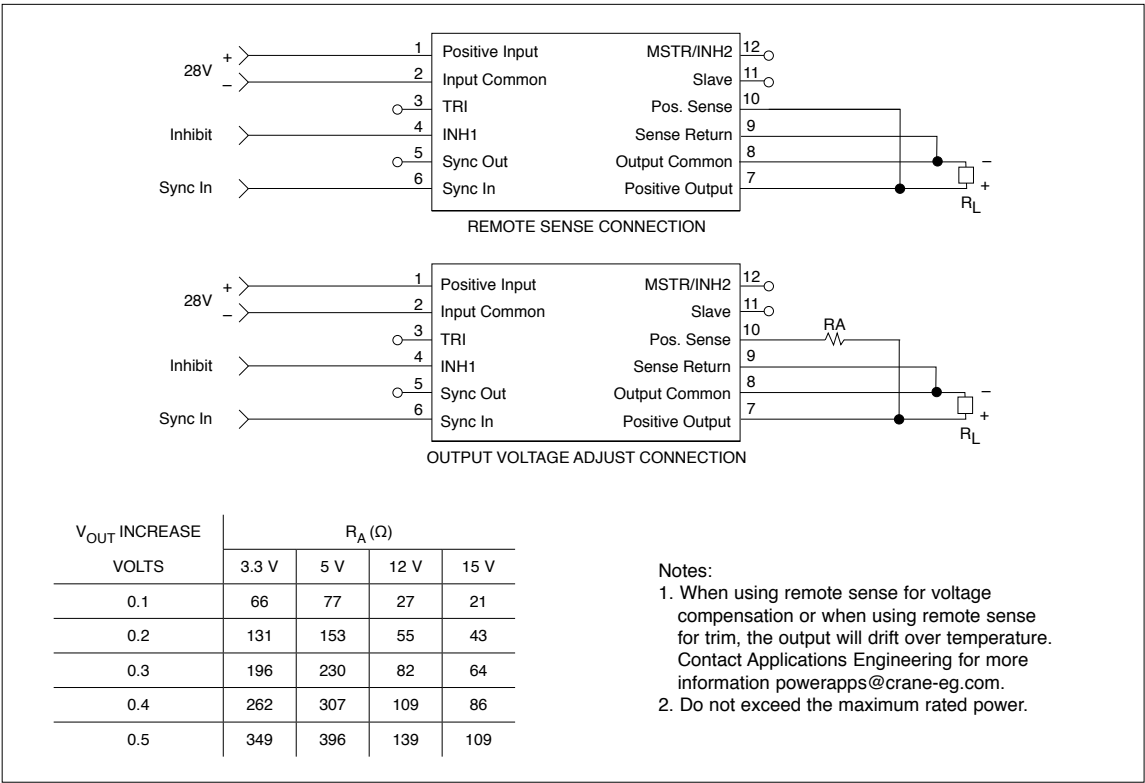


FIGURE 1: SENSE CONNECTIONS AND TRIM TABLE – SINGLE OUTPUT MODELS

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

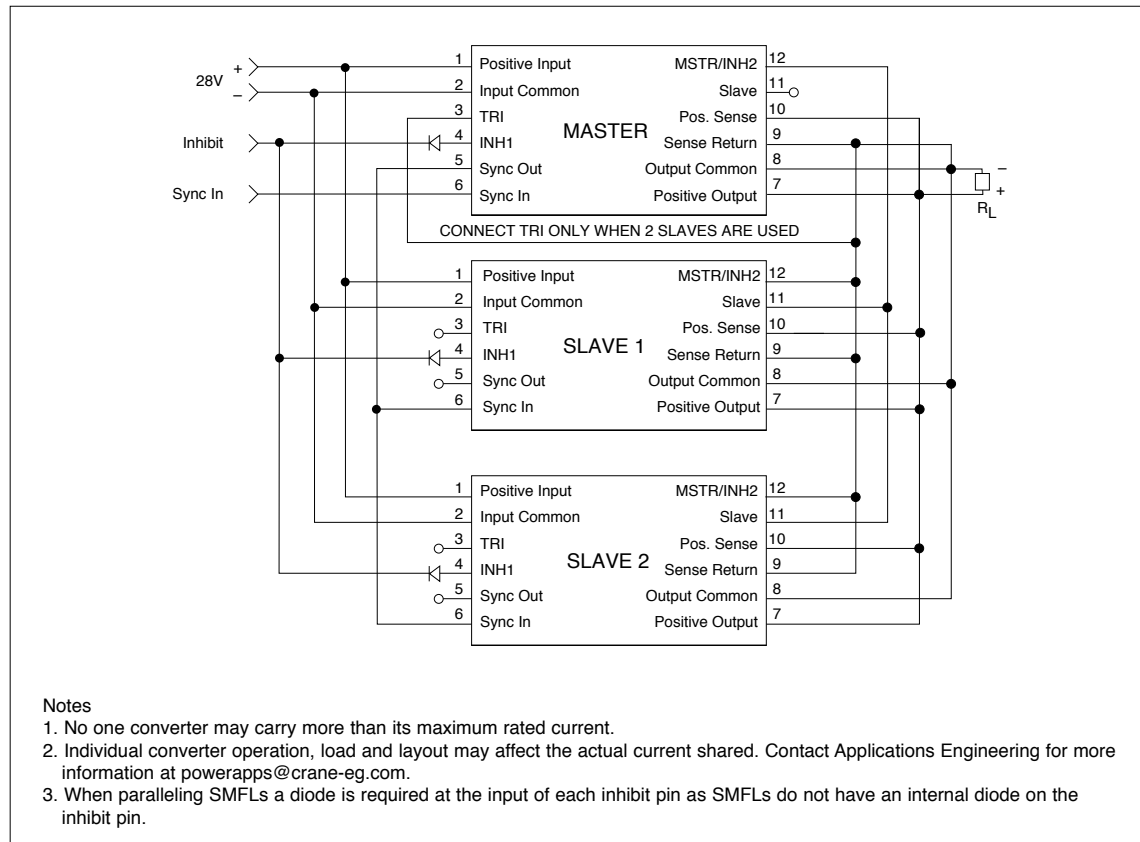


FIGURE 2: PARALLEL CONNECTIONS – SINGLE OUTPUT MODELS

SMFLHP Single and Dual DC-DC Converters


28 VOLT INPUT – 100 WATT

PIN OUT		
Pin	Single Output	Dual Output
1	Positive Input	Positive Input
2	Input Common	Input Common
3	Triple (TRI)	Triple (TRI)
4	Inhibit 1 (INH1)	Inhibit 1 (INH1)
5	Sync Out	Sync Out
6	Sync In	Sync In
7	Positive Output	Positive Output
8	Output Common	Output Common
9	Sense Return	Negative Output
10	Positive Sense	No connection
11	Slave	Slave
12	Master/Inhibit 2 (MSTR/INH2)	Master/Inhibit 2 (MSTR/INH2)

TABLE 1: PIN OUT

PINS NOT IN USE	
TRI	Leave unconnected
Inhibit 1 (INH1)	Leave unconnected
Sync Out	Leave unconnected
Sync In	Connect to Input Common
Sense Return	Connect to appropriate outputs
Positive Sense	Connect to appropriate outputs
Slave	Leave unconnected
Master/Inhibit 2 (MSTR/INH2)	Leave unconnected

TABLE 2: PINS NOT IN USE

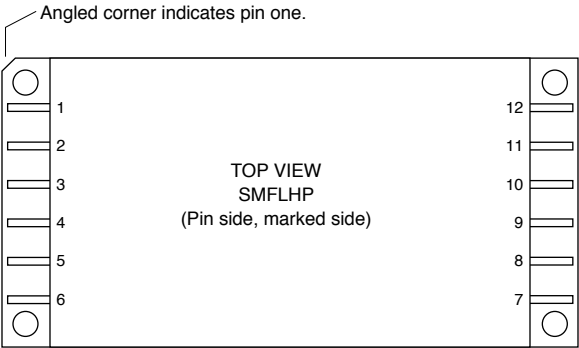

See cases "Figure 18: Case U" on page 12 and
"Figure 19: Case V" on page 13 for dimensions.
Case V has the same pin out.

FIGURE 3: PIN OUT

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

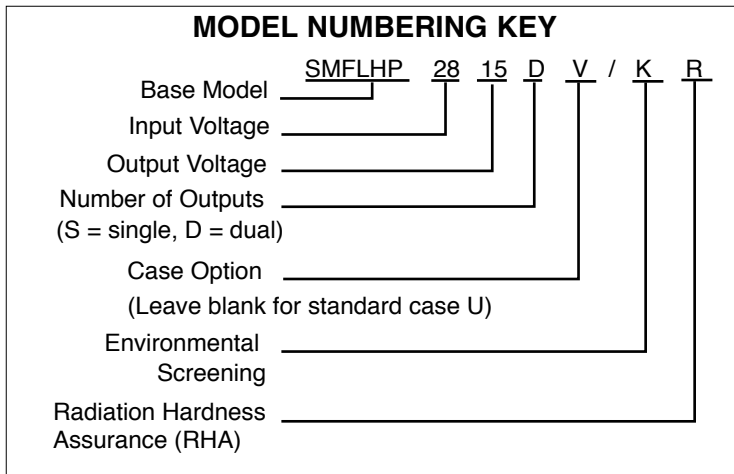


FIGURE 4: MODEL NUMBERING KEY

SMD NUMBERS

STANDARD MICROCIRCUIT DRAWING (SMD)	SMFL SERIES SIMILAR PART
5962R0620901KXC	SMFLHP283R3S/KR
5962R0822301KXC	SMFLHP2815D/KR
The SMD number shown is for Class K screening, radiation hardness assurance (RHA) level R. For exact specifications for an SMD product, refer to the SMD drawing. SMDs can be downloaded from www.landandmaritime.dla.mil/programs/smc	

TABLE 3: SMD NUMBER CROSS REFERENCE

MODEL NUMBER OPTIONS TO DETERMINE THE MODEL NUMBER ENTER ONE OPTION FROM EACH CATEGORY IN THE FORM BELOW.						
CATEGORY	Base Model and Input Voltage	Output Voltage ¹	Number of Outputs ²	Case Options ³	Screening ⁴	RHA ⁵
OPTIONS	SMFLHP28	3R3, 05, 12, 15	S	(U, leave blank)	O	O
		05, 12, 15	D	V	H	P
					K	R
FILL IN FOR MODEL #	SMFLHP28	_____	_____	_____	/ _____	_____
Notes 1. Output Voltage: An R indicates a decimal point. 3R3 is 3.3 volts out. The value of 3R3 is only available in single output models. 2. Number of Outputs: S is a single output and D is a dual output. 3. Case Options: For the standard case ("Figure 18: Case U" on page 12) leave the case option blank. For the down-leaded case option ("Figure 19: Case V" on page 13,) insert the letter V in the case option position. 4. Screening: A screening level of O is a Space Prototype and is only used with RHA O. See "Table 9: Element Evaluation" on page 14 and "Table 10: Environmental Screening and RHA Levels" on page 15 for more information. 5. RHA: Interpoint model numbers use an "O" in the RHA designator position to indicate the "-" (dash) Radiation Hardness Assurance level of MIL-PRF-38534, which is defined as "no RHA." RHA O is only available with Screening level O. See "Table 10: Environmental Screening and RHA Levels" on page 15 for more information.						

TABLE 4: MODEL NUMBER OPTIONS

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TABLE 5: OPERATING CONDITIONS, ALL MODELS, 25°C CASE, 28 VIN, 100% LOAD, UNLESS OTHERWISE SPECIFIED.

		ALL MODELS			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	
LEAD SOLDERING TEMPERATURE ¹	10 SECONDS MAX.	—	—	300	°C
STORAGE TEMPERATURE ¹		-65	—	+150	°C
CASE OPERATING TEMPERATURE	FULL POWER	-55	—	+125	°C
	ABSOLUTE ¹	-55	—	+135	
DERATING OUTPUT POWER/CURRENT ¹	LINEARLY	From 100% at 125°C to 0% at 135°C			
ESD RATING ¹ MIL-PRF-38534, 3.9.5.8.2	MIL STD 883 METHOD 3015 CLASS 3B	>8000			V
ISOLATION: INPUT TO OUTPUT OR ANY PIN TO CASE	@ 500 VDC AT 25°C	100	—	—	Megohms
INPUT TO OUTPUT CAPACITANCE ¹		—	150	—	pF
CURRENT LIMIT ²	% OF FULL LOAD	—	125	—	%
UNDERVOLTAGE LOCKOUT ¹ -55°C TO +125°C	RISING VIN (TURN ON)	16.0	—	18.5	V
	FALLING VIN (TURN OFF)	13.4	—	16.7	
AUDIO REJECTION ¹		—	50	—	dB
CONVERSION FREQUENCY, FREE RUN -55°C TO +125°C	15 DUAL	525	—	675	kHz
	ALL OTHER MODELS	550	—	650	
SYNCHRONIZATION IN -55°C TO +125°C	INPUT FREQUENCY	525	—	675	kHz
	DUTY CYCLE ¹	40	—	60	%
	ACTIVE LOW	—	—	0.8	V
	ACTIVE HIGH ¹	4.5	—	5.0	
	REFERENCED TO	INPUT COMMON			
	IF NOT USED	CONNECT TO INPUT COMMON			
	SYNCHRONIZATION OUT	REFERENCED TO	INPUT COMMON		
IF NOT USED		LEAVE UNCONNECTED			
INHIBIT 1 ACTIVE LOW (OUTPUT DISABLED) Do not apply a voltage to the inhibit pin. ³	INHIBIT PIN PULLED LOW	—	—	0.8	V
	INHIBIT PIN SOURCE CURRENT ¹	—	—	10	mA
	REFERENCED TO	INPUT COMMON			
INHIBIT 1 ACTIVE HIGH (OUTPUT ENABLED) Do not apply a voltage to the inhibit pin. ³	INHIBIT PIN CONDITION	OPEN COLLECTOR OR UNCONNECTED			
	OPEN INHIBIT PIN VOLTAGE ¹	9	—	12	V
INHIBIT 2 ACTIVE LOW (OUTPUT DISABLED) Do not apply a voltage to the inhibit pin. ³	INHIBIT PIN PULLED LOW	—	—	0.5	V
	INHIBIT PIN SOURCE CURRENT ¹	—	—	5	mA
	REFERENCED TO	OUTPUT COMMON			
INHIBIT 2 ACTIVE HIGH (OUTPUT ENABLED) Do not apply a voltage to the inhibit pin. ³	INHIBIT PIN CONDITION	OPEN COLLECTOR OR UNCONNECTED			
	OPEN INHIBIT PIN VOLTAGE ¹	—	—	9	V

**For mean time between failures (MTBF) contact Applications Engineering
powerapps@crane-eg.com +1.425.882.3100 option 7**

Notes:

1. Guaranteed by qualification test and/or analysis. Not an in-line test.
2. Dual outputs: The over-current limit will trigger when the sum of the currents from both outputs reaches 125% (typical value) of the maximum rated "total" current of both outputs.

3. An external inhibit interface should be used to pull the inhibits low or leave them floating. The inhibit pins can be left unconnected if not used.

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TABLE 6: ELECTRICAL CHARACTERISTICS -55°C TO +125°C CASE, 28 VIN, 100% LOAD, FREE RUN, UNLESS OTHERWISE SPECIFIED.

SINGLE OUTPUT MODELS		SMFLHP283R3S			SMFLHP2805S			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE		3.23	3.30	3.37	4.875	5.00	5.125	V
OUTPUT CURRENT	$V_{IN} = 19 \text{ to } 40 \text{ V}$	0	—	16	0	—	16	A
OUTPUT POWER	$V_{IN} = 19 \text{ to } 40 \text{ V}$	0	—	53	0	—	80	W
OUTPUT RIPPLE 10 kHz - 2 MHz	$T_C = 25^\circ\text{C}$	—	10	25	—	15	50	mV p-p
	$T_C = -55^\circ\text{C TO } +125^\circ\text{C}$	—	20	40	—	30	90	
LINE REGULATION	$V_{IN} = 19 \text{ TO } 40 \text{ V}$	—	0	50	—	0	50	mV
LOAD REGULATION	NO LOAD TO FULL	—	0	20	—	0	20	mV
INPUT VOLTAGE	CONTINUOUS	19	28	40	19	28	40	V
NO LOAD TO FULL	TRANSIENT 50 ms ^{1, 2}	—	—	80	—	—	80	V
INPUT CURRENT	NO LOAD	—	70	120	—	70	120	mA
	INHIBITED - INH1	—	9	15	—	9	15	
	INHIBITED - INH2	—	35	80	—	35	80	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	30	80	—	30	80	mA p-p
EFFICIENCY	$T_C = 25^\circ\text{C}$	70	72	—	76	80	—	%
	$T_C = -55^\circ\text{C to } +125^\circ\text{C}$	65	—	—	74	—	—	
LOAD FAULT	POWER DISSIPATION	—	15	24	—	15	22	W
SHORT CIRCUIT	RECOVERY ¹	—	1.5	10	—	1.5	10	ms
STEP LOAD RESPONSE ³ 50% - 100% - 50%	TRANSIENT	—	±350	±400	—	±350	±450	mV pk
	RECOVERY ¹	—	1.5	3.0	—	1.5	3.0	ms
STEP LINE RESPONSE ^{1, 3} 19 - 40 - 19 V	TRANSIENT	—	±250	±400	—	±250	±400	mV pk
	RECOVERY ¹	—	200	300	—	200	600	μs
START-UP ⁴	DELAY	—	3.5	10	—	3.5	10	ms
	OVERSHOOT ¹	—	0	50	—	0	25	mV pk
CAPACITIVE LOAD ^{1, 5}	$T_C = 25^\circ\text{C}$	—	—	1000	—	—	1000	μF

Notes

1. Guaranteed by qualification test and/or analysis. Not an in-line test.
 2. Converter will shut down above approximately 45 V but will be undamaged and will restart when voltage drops into normal range.

3. Recovery time is measured from application of the transient to point at which V_{out} is within 1% of final value.

4. Tested on release from inhibit.

5. Shall not compromise dc performance.

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TABLE 7: ELECTRICAL CHARACTERISTICS -55°C TO +125°C CASE, 28 VIN, 100% LOAD, FREE RUN, UNLESS OTHERWISE SPECIFIED.

SINGLE OUTPUT MODELS		SMFLHP2812S			SMFLHP2815S			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE		11.76	12.00	12.24	14.55	15.00	15.45	V
OUTPUT CURRENT	$V_{IN} = 19 \text{ to } 40 \text{ V}$	0	—	7.5	0	—	6.67	A
OUTPUT POWER	$V_{IN} = 19 \text{ to } 40 \text{ V}$	0	—	90	0	—	100	W
OUTPUT RIPPLE 10 kHz - 2 MHz	$T_C = 25^\circ\text{C}$	—	30	85	—	30	95	mV p-p
	$T_C = -55^\circ\text{C TO } +125^\circ\text{C}$	—	45	150	—	45	175	
LINE REGULATION	$V_{IN} = 19 \text{ to } 40 \text{ V}$	—	0	50	—	0	50	mV
LOAD REGULATION	NO LOAD TO FULL	—	0	20	—	0	20	mV
INPUT VOLTAGE	CONTINUOUS	19	28	40	19	28	40	V
NO LOAD TO FULL	TRANSIENT 50 ms ^{1, 2}	—	—	80	—	—	80	V
INPUT CURRENT	NO LOAD	—	80	80	—	80	120	mA
	INHIBITED - INH1	—	9	15	—	9	15	
	INHIBITED - INH2	—	35	80	—	35	80	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	30	80	—	30	80	mA p-p
EFFICIENCY	$T_C = 25^\circ\text{C}$	81	86	—	82	87	—	%
	$T_C = -55^\circ\text{C to } +125^\circ\text{C}$	79	—	—	80	—	—	
LOAD FAULT	POWER DISSIPATION	—	15	22	—	15	30	W
SHORT CIRCUIT	RECOVERY ¹	—	1.5	10	—	1.5	10	ms
STEP LOAD RESPONSE ³ 50% - 100% - 50%	TRANSIENT	—	±450	±700	—	±450	±700	mV pk
	RECOVERY ¹	—	1.5	3.0	—	1.5	3.0	ms
STEP LINE RESPONSE ^{1, 3} 19 - 40 - 19 V	TRANSIENT	—	±250	±800	—	±250	±800	mV pk
	RECOVERY	—	200	600	—	200	600	μs
START-UP ⁴	DELAY	—	3.5	10	—	3.5	10	ms
	OVERSHOOT ¹	—	0	50	—	0	50	mV pk
CAPACITIVE LOAD ^{1, 5}	$T_C = 25^\circ\text{C}$	—	—	1000	—	—	1000	μF

Notes

1. Guaranteed by qualification test and/or analysis. Not an in-line test.
 2. Converter will shut down above approximately 45V but will be undamaged and will restart when voltage drops into normal range.

3. Recovery time is measured from application of the transient to point at which Vout is within 1% of final value.

4. Tested on release from inhibit.

5. Shall not compromise dc performance.

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TABLE 8: ELECTRICAL CHARACTERISTICS -55°C TO +125°C CASE, 28 VIN, 100% LOAD, FREE RUN, UNLESS OTHERWISE SPECIFIED.

DUAL OUTPUT MODELS		SMFLHP2805D			SMFLHP2812D			SMFLHP2815D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	+ V _{OUT}	4.85	5.00	5.15	11.64	12.00	12.36	14.55	15.00	15.45	V
	- V _{OUT}	4.82	5.00	5.18	11.58	12.00	12.42	14.47	15.00	15.53	
OUTPUT CURRENT ² V _{IN} = 19 to 40 V	EITHER OUTPUT	0	±8	11.2	0	±3.75	5.3	0	±3.33	4.67	A
	TOTAL	—	—	16.0	0	—	7.5	0	—	6.67	
OUTPUT POWER ² V _{IN} = 19 to 40 V	EITHER OUTPUT	0	±40	56	0	±45	63	0	±50	70	W
	TOTAL	0	—	80	0	—	90	0	—	100	
OUTPUT RIPPLE 10 kHz - 2 MHz, ±V _{OUT}	T _C = 25°C	—	25	100	—	50	125	—	50	120	mV p-p
	T _C = -55°C TO +125°C	—	—	150	—	—	175	—	—	225	
LINE REGULATION V _{IN} = 19 TO 40 V	+ V _{OUT}	—	0	50	—	0	50	—	0	50	mV
	- V _{OUT}	—	25	100	—	25	100	—	25	100	
LOAD REGULATION NO LOAD TO FULL	+ V _{OUT}	—	0	50	—	10	100	—	10	100	mV
	- V _{OUT}	—	25	100	—	50	200	—	50	200	
CROSS REGULATION T _C = 25°C	SEE NOTE 3	—	—	400	—	—	480	—	—	600	mV
	SEE NOTE 4	—	—	400	—	—	480	—	—	600	
INPUT VOLTAGE NO LOAD TO FULL	CONTINUOUS	19	28	40	19	28	40	19	28	40	V
	TRANSIENT 50 ms ^{1, 5}	0	—	80	0	—	80	0	—	80	V
INPUT CURRENT	NO LOAD	—	50	80	—	50	120	—	50	120	mA
	INHIBITED - INH1	—	9	14	—	9	14	—	9	14	
	INHIBITED - INH2	—	35	80	—	35	80	—	35	80	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	30	80	—	30	80	—	30	80	mA p-p
EFFICIENCY BALANCED LOAD	T _C = 25°C	75	80	—	83	86	—	82	87	—	%
	T _C = -55°C TO +125°C	73	—	—	81	—	—	80	—	—	
LOAD FAULT	POWER DISSIPATION	—	15	25	—	15	22	—	15	21	W
SHORT CIRCUIT	RECOVERY ¹	—	1.5	10	—	1.5	4.0	—	1.5	4.0	ms
STEP LOAD RESPONSE ⁶ ± V _{OUT} , 50% - 100% - 50%	TRANSIENT	—	±350	±450	—	±450	±700	—	±450	±700	mV pk
	RECOVERY ¹	—	1.5	3.0	—	1.5	3.0	—	1.5	3.0	ms
STEP LINE RESPONSE ^{1, 6} ± V _{OUT} , 19 - 40 - 19 V	TRANSIENT	—	±250	±600	—	±250	±800	—	±250	±800	mV pk
	RECOVERY	—	200	300	—	200	600	—	200	600	μs
START-UP ⁷	DELAY	—	3.5	20	—	3.5	20	—	3.5	20	ms
	OVERSHOOT ¹	—	0	25	—	0	50	—	0	50	mV pk
CAPACITIVE LOAD ^{1, 8, 9}	T _C = 25°C	—	—	500	—	—	500	—	—	500	μF

Notes

1. Guaranteed by qualification test and/or analysis. Not an in-line test.
2. Up to 70% of the total output power/current is available from either output provided the opposite output is carrying 30% of the power/current in use.
3. Effect on negative V_{out} from 50%/50% loads to 30%/70% or 70%/30% loads.
4. Effect on negative V_{out} from 50%/50% loads to 10% then 50% load on negative V_{out}

5. Converter will shut down above approximately 45V but will be undamaged and will restart when voltage drops into normal range.
6. Recovery time is measured from application of the transient to point at which V_{out} is within 1% of final value.
7. Tested on release from inhibit.
8. Shall not compromise dc performance.
9. Applies to each output.

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TYPICAL PERFORMANCE PLOTS: 25°C CASE, 28 VIN, 100% LOAD, FREE RUN, UNLESS OTHERWISE SPECIFIED.
These are examples for reference only and are not guaranteed specifications.

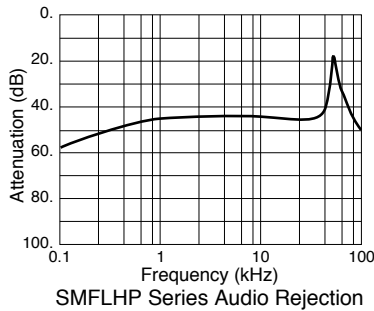


FIGURE 5

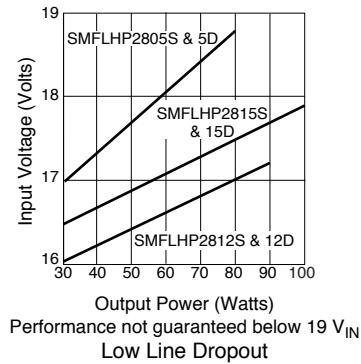


FIGURE 6

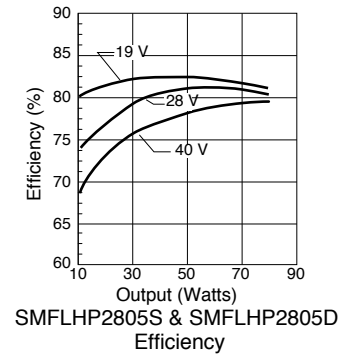


FIGURE 7

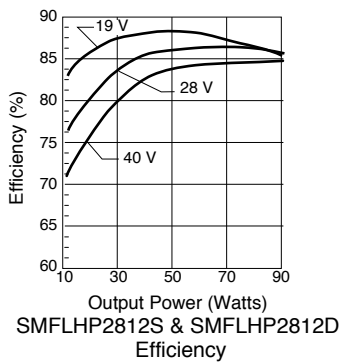


FIGURE 8

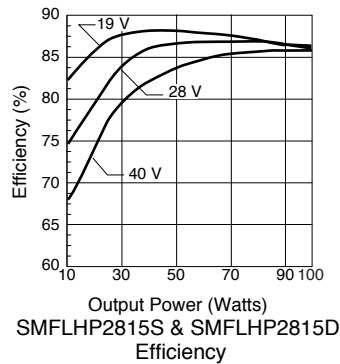


FIGURE 9

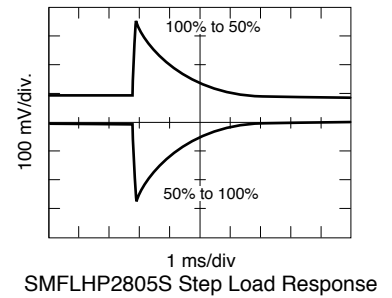


FIGURE 10

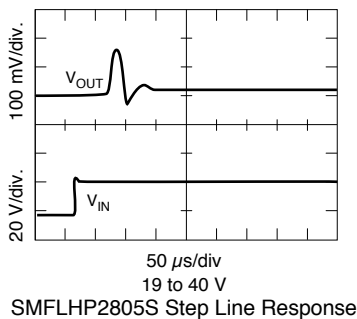


FIGURE 11

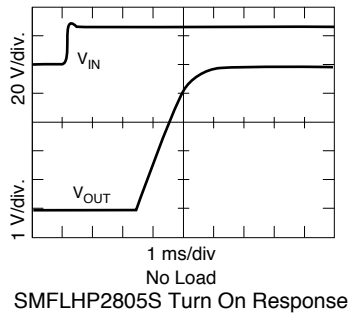


FIGURE 12

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TYPICAL PERFORMANCE PLOTS: 25°C CASE, 28 VIN, 100% LOAD, FREE RUN, UNLESS OTHERWISE SPECIFIED.
These are examples for reference only and are not guaranteed specifications.


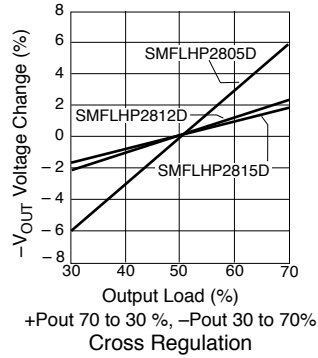


FIGURE 13

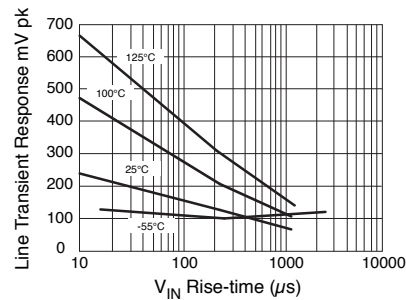

SMFLHP2815D Line Transient Response
vs. V_{IN} Rise-time

FIGURE 14

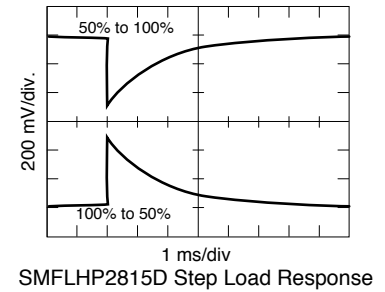


FIGURE 15

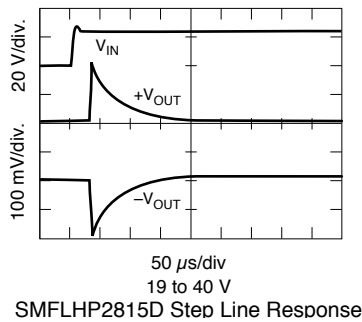


FIGURE 16

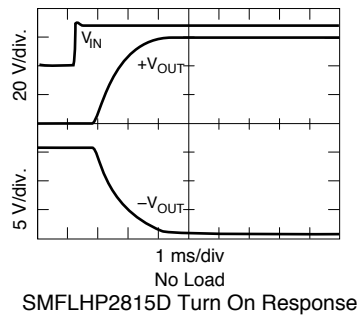



FIGURE 17

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

TOP VIEW CASE V Flanged case, down leaded

Case "V" requires a "V" in the Case Option position of the model number.

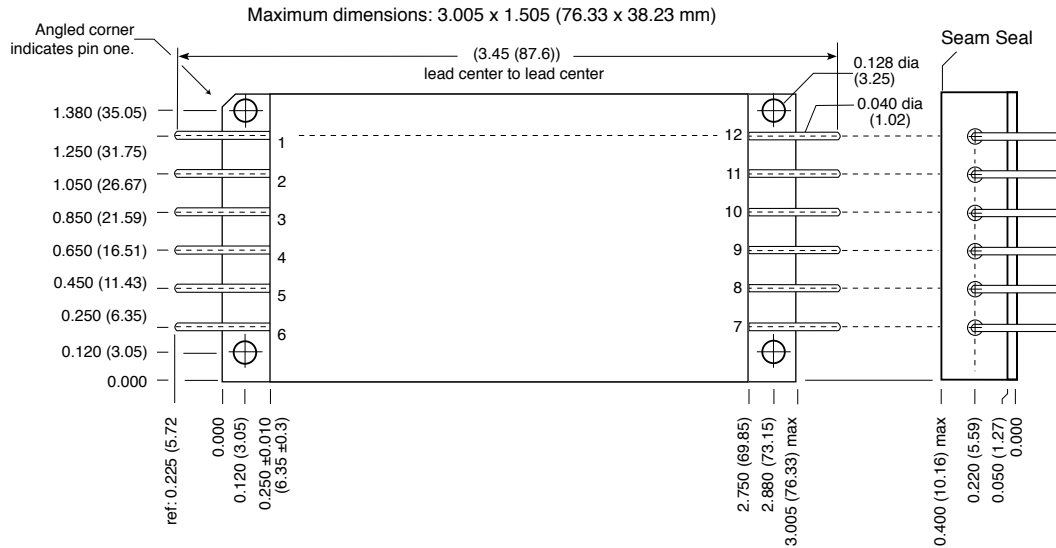

Weight: 86 grams maximum

Case dimensions in inches (mm)

Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
 unless otherwise specified

CAUTION

Heat from reflow or wave soldering may damage the device. Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin.

Materials

Header Cold Rolled Steel/Nickel/Gold
 Cover Kovar/Nickel
 Pins OFHC copper/gold, compression glass seal
 Gold plating of 50 - 150 microinches is included in pin diameter
 Seal Hole: 0.120 ±0.002 (3.05 ±0.05)

Case V, Rev H, 2014.03.06

Please refer to the numerical dimensions for accuracy.

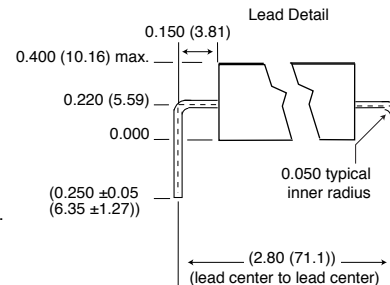


FIGURE 19: CASE V

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

Table is for reference only. See individual Series' datasheets for specific screening.

DC-DC CONVERTERS PROTOTYPE, CLASS H AND CLASS K, MIL-PRF-38534 ELEMENT EVALUATION

COMPONENT-LEVEL TEST PERFORMED	NON-QML ¹	QML			
	PROTOTYPE	CLASS H		CLASS K	
	/O	/H		/K	
	M/S ²	M/S ²	P ³	M/S ²	P ³
Element Electrical	■	■	■	■	■
Visual		■	■	■	■
Internal Visual		■		■	
Temperature Cycling				■	■
Constant Acceleration				■	■
Interim Electrical				■	
Burn-in				■	
Post Burn-in Electrical				■	
Steady State Life				■	
Voltage Conditioning Aging					■
Visual Inspection					■
Final Electrical		■	■	■	■
Wire Bond Evaluation		■	■	■	■
SEM				■	

Notes

1. Non-QML products may not meet all of the requirements of MIL-PRF-38534.
2. M/S = Active components (microcircuit and semiconductor die)
3. P = Passive components, Class H and K element evaluation. Not applicable to space prototype ("O") element evaluation.

Definitions:

Element Evaluation: Component testing/screening per MIL-STD-883 as determined by MIL-PRF-38534

SEM: Scanning Electron Microscopy

TABLE 9: ELEMENT EVALUATION

SMFLHP Single and Dual DC-DC Converters

28 VOLT INPUT – 100 WATT

DC-DC CONVERTERS PROTOTYPE, CLASS H AND CLASS K MIL-PRF-38534 ENVIRONMENTAL SCREENING AND RHA¹ P OR R

TEST PERFORMED	NON-QML ²	QML ³			
	PROTOTYPE	CLASS H		CLASS K	
	/OO	/HP	/HR	/KP	/KR
Non-destruct wire bond pull, Method 2023		■ ⁴	■ ⁴	■	■
Pre-cap Inspection, Method 2017, 2032	■	■	■	■	■
Temperature Cycle (10 times) (Qual 100 times) Method 1010, Cond. C, -65°C to +150°C, ambient	■	■	■	■	■
Constant Acceleration Method 2001, 3000 g (Qual 5000 g)	■	■	■	■	■
PIND, Test Method 2020, Cond. A		■ ⁴	■ ⁴	■	■
Pre burn-in test, Group A, Subgroups 1 and 4	■	■ ⁴	■ ⁴	■	■
Burn-in Method 1015, +125°C case, typical ⁵					
96 hours	■				
160 hours		■	■		
2 x 160 hours (includes mid-BI test)				■	■
Final Electrical Test, MIL-PRF-38534, Group A, Subgroups 1 and 4: +25°C case	■				
Subgroups 1 through 6, -55°C, +25°C, +125°C case		■	■	■	■
Hermeticity Test					
Gross Leak, Method 1014, Cond. C	■	■	■	■	■
Fine Leak, Method 1014, Cond. A	■	■	■	■	■
Radiography, Method 2012				■	■
Post Radiography Electrical Test, +25°C case				■ ⁴	■ ⁴
Final visual inspection, Method 2009	■	■	■	■	■
RHA P: 30 krad(Si) total dose		■		■	
RHA R: 100 krad(Si) total dose			■		■
Single Event Effect (SEE) ¹ Linear Energy Transfer (LET) 86 MeV cm ² /mg		■	■	■	■

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.

Notes

1. Our Redmond facility has a DLA approved RHA plan for Interpoint power products. Our SMD products with RHA "P" or "R" code meet DLA requirements.
2. "OO" prototypes are non-QML products and may not meet all of the requirements of MIL-PRF-38534. "O" in the RHA designator position in Interpoint model numbers indicates DLA RHA "-" defined as no RHA.
3. All processes are QML qualified and performed by certified operators.
4. Not required by DLA but performed to assure product quality.
5. Burn-in temperature designed to bring the case temperature to +125°C minimum. Burn-in is a powered test.

TABLE 10: ENVIRONMENTAL SCREENING AND RHA LEVELS